



Installation: pole top mounted or on extension arms with $\varnothing 60 \times 120$ mm ending

Ingress protection: IP 66 for the optical part and the driver

Material: body and cover made of high-pressure die casted aluminium alloy

Colour: body RAL 9006 structure, cover – SILVER RENOIR, LED cover black anodised

Optical system: PMMA optics, interchangeable LED module

Number of LEDs: 24 for 48W, 60W, 72W

Operating temperature range: from -40°C to $+40^{\circ}\text{C}$

Expected useful lifetime: L90F10 – 50 000 h, L80F20 – 100 000 h

CRI: >70 for 5000K, 4000K; >80 for 3500K

Corrective factor S/P: 1,8 for 5000K; 1,45 for 3500K; 1,55 for 4000K

Input voltage frequency: 50 - 60Hz

Power factor: ≥ 0.95

Inrush electric current: 43A / 260 μs for 48W, 60W, 72W

Luminaire MAGNOLIA LED has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).




Code	Symbol	LED power	Luminaire Power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ²⁾	Luminaire luminous flux ²⁾	Luminous efficacy	Unit volume	Luminaire net weight
220933/3/... ¹⁾	MAGNOLIA LED 48	48W	55W	700mA	3500K	7 000lm	6550lm	119lm/W	0,05m ³	11kg
220933/4/... ¹⁾	MAGNOLIA LED 48	48W	55W	700mA	4000K	7 300lm	6800lm	124lm/W	0,05m ³	11kg
220933/6/... ¹⁾	MAGNOLIA LED 48	48W	55W	700mA	5000K	8 150lm	7100lm	129lm/W	0,05m ³	11kg
220934/3/... ¹⁾	MAGNOLIA LED 60	60W	67W	830mA	3500K	8 050lm	7700lm	115lm/W	0,05m ³	11kg
220934/4/... ¹⁾	MAGNOLIA LED 60	60W	67W	830mA	4000K	8 950lm	8000lm	119lm/W	0,05m ³	11kg
220934/6/... ¹⁾	MAGNOLIA LED 60	60W	67W	830mA	5000K	9 350lm	8400lm	125lm/W	0,05m ³	11kg
220935/3/... ¹⁾	MAGNOLIA LED 72	72W	80W	1000mA	3500K	9 400lm	8950lm	122lm/W	0,05m ³	11kg
220935/4/... ¹⁾	MAGNOLIA LED 72	72W	80W	1000mA	4000K	10 450lm	9300lm	116lm/W	0,05m ³	11kg
220935/6/... ¹⁾	MAGNOLIA LED 72	72W	80W	1000mA	5000K	10 950lm	9750lm	123lm/W	0,05m ³	11kg


1) Symbol of chosen optical system eg. **220933/6/T2** is **MAGNOLIA LED 48 5000K with T2 optical system**

2) tolerance +/- 3% due to LEDs accuracy


Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC

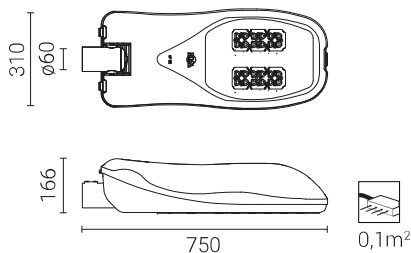


DW

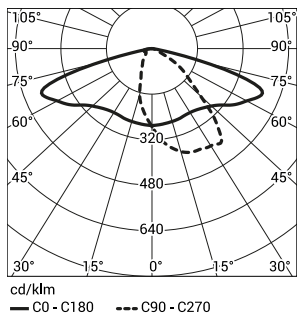


ME

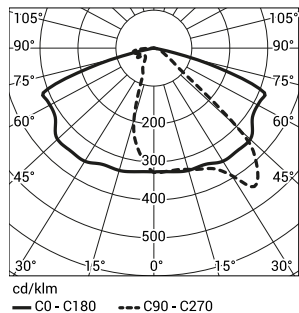


T2




T3



T4

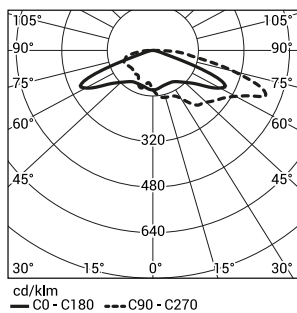

PP

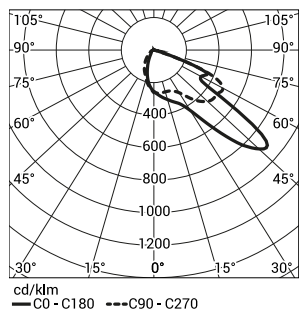

Luminaire MAGNOLIA LED in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

Acceptable quantity of luminaires MAGNOLIA LED on one circuit, protected by:

Overcurrent switches MCB type B or C

Luminaire	Type	2A	4A	6A	10A	16A	20A	25A
MAGNOLIA LED 48, 60, 72W	B	0	1	3	6	10	12	15
	C	1	3	5	10	17	20	26

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
MAGNOLIA LED 48, 60, 72W	2	6	9	17	27	34	43