

Connection box TB-12



connection boxes with 4 tracks for feeder cables with cross-section from 4 x 10 mm² up 4 x 35 mm²

max. 2 cables

simplified installation of cables ensure easier and more ergonomic operation

smaller size provides more opportunities of applications

the possibility of moving the fuse-sockets


Number of fuse-sockets: Two fuse-socket mounted on two phases L1 and L2

Material: integrated terminal strip – made of PTB material (butylene polyterephthalate), with high insulation parameters and high mechanical resistance; connection cover and clamp/cable protection – made of transparent polycarbonate; connection box base – made of polycarbonate reinforced by fibre glass, cable opening/outlets are protected with gaskets



Code	Symbol	Fuse sockets quantity	Protection class	Protection degree	Rated insulation voltage	Withstand stroke voltage rating	Rated current	Weight	Unit volume
324012	TB-12	2	II	IP54	500V	6kV	80A	0,7kg	0,0017m ³

Directive 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014),
Directive 2011/65/UE

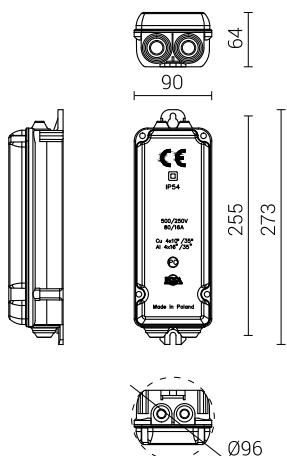

Fuses

Name	Code	Weight
D01/E14 6A	322006	0,01kg
D01/E14 10A	322010	0.01kg
D01/E14 16A	322016	0.01kg