

Connection box NTB-1



5 tracks connection boxes for feeder cables with cross-section from 5 x 6 mm² up to 5 x 16 mm²

max. 3 cables

the possibility of splitting load into particular phases

the possibility of moving the fuse-sockets


Number of fuse-sockets: One fuse-socket mounted on L1 phase, there is a possibility of moving the fuse-socket on phase L2 or L3 by screwing-out two bolts

Material: integrated terminal strip – made of PTB material (butylene polyterephthalate), with high insulation parameters and high mechanical resistance; connection cover and clamp/cable protection – made of transparent polycarbonate; connection box base – made of polycarbonate reinforced by fibre glass, cable opening/outlets are protected with gaskets



Code	Symbol	Fuse sockets quantity	Protection class	Protection degree	Rated insulation voltage	Rated impulse withstand voltage	Rated current	Weight	Unit volume
324110	NTB-1	1	II	IP54	500V	6kV	80A	0,71kg	0,0019m ³

Directive 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014),
Directive 2011/65/UE

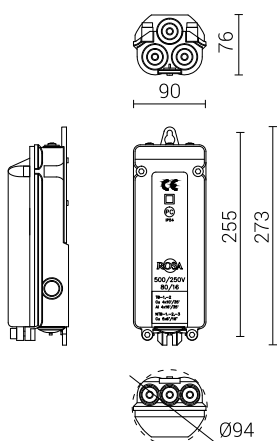

Fuses

Name	Code	Weight
D01/E14 6A	322006	0,01kg
D01/E14 10A	322010	0.01kg
D01/E14 16A	322016	0.01kg