




| | |
|------------------------------------|--|
| Application | surrounding office buildings, parks, pedestrians |
| Colour | inox / grey |
| Ingress protection | IP 66 for the optical part and the driver |
| Material | anodised aluminium alloy |
| Operating temperature range | from -40°C to +55°C |
| Expected useful lifetime | L90B10 - 100 000 h |
| Input voltage frequency | 50/60Hz |




| Code | Symbol | LED power | Luminaire Power consumption | Colour temperature (CCT) | Luminaire luminous flux 1 | Luminous efficacy | Unit volume | Concrete footing / reinforcement basket type | Net weight |
|----------|------------------|-----------|-----------------------------|--------------------------|---------------------------|-------------------|-------------|--|------------|
| 215908/1 | SIMPLE CUT LED 8 | 8 W | 14 W | 2700 K | 470 lm | 34 lm/W | 0.022 m3 | B-0A / Z-0A | 5.6 kg |
| 215908/3 | SIMPLE CUT LED 8 | 8 W | 14 W | 3500 K | 530 lm | 38 lm/W | 0.022 m3 | B-0A / Z-0A | 5.6 kg |
| 215908/4 | SIMPLE CUT LED 8 | 8 W | 14 W | 4000 K | 600 lm | 43 lm/W | 0.022 m3 | B-0A / Z-0A | 5.6 kg |
| 215908/6 | SIMPLE CUT LED 8 | 8 W | 14 W | 5000 K | 600 lm | 43 lm/W | 0.022 m3 | B-0A / Z-0A | 5.6 kg |

1) tolerance +/- 7% due to LEDs accuracy

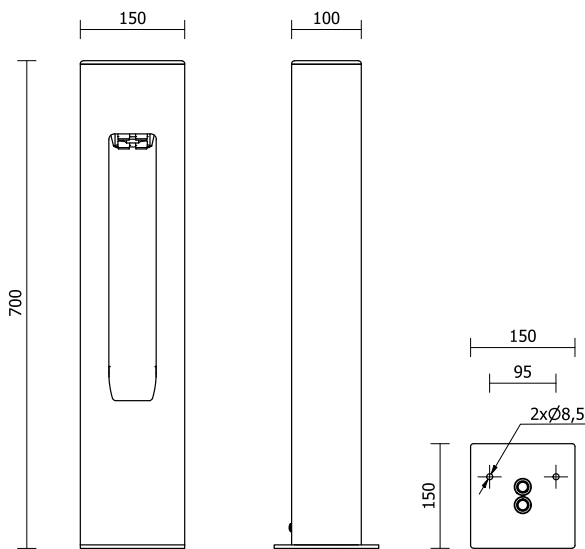

SIMPLE CUT LED

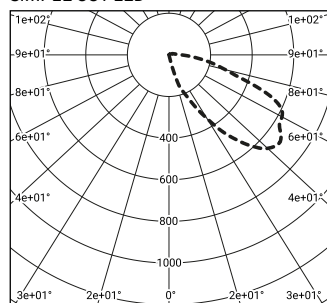

cd/klm
 — C0 - C180 - - - C90 - C270

Wyłączniki nadprądowe MCB typu B lub C

| Kolumna | Typ | 2A | 4A | 6A | 10A | 16A | 20A | 25A |
|----------------|-----|----|----|----|-----|-----|-----|-----|
| SIMPLE CUT LED | B | 1 | 2 | 3 | 5 | 8 | 10 | 12 |
| | C | 1 | 3 | 5 | 8 | 13 | 16 | 20 |

Bezpieczniki topikowe—typ gG i gL

| Kolumna | 2A | 4A | 6A | 10A | 16A | 20A | 25A |
|----------------|----|----|----|-----|-----|-----|-----|
| SIMPLE CUT LED | 0 | 3 | 5 | 7 | 15 | 20 | 29 |