



TECHNICAL DATA

Application	residential roads (internal), parks, pedestrians
Colour	graphite / inox
Ingress protection	IP 66
Optical system	PMMA optics
Material	anodised aluminium alloy
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Input voltage frequency	50/60Hz
Power factor	≥0.95
Number of LED	2x16
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).
Concrete footing / reinforcement basket	B-50 (311150) / Z-50 (311205)

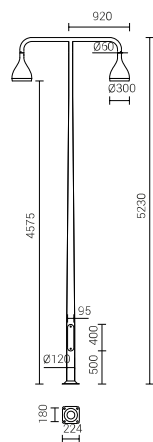



TABLE OF TYPES

Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ¹	Luminaire luminous flux ¹	Luminous efficacy ¹	Unit volume	Net weight
215130/1/... ²	DROP II LED 2 x 24	5.2 m	24 W x 2	28 W x 2	500 mA	2700 K	3700 lm x 2	3500 lm x 2	125 lm/W	1.7 m ³	34.9 kg
215130/3/... ²	DROP II LED 2 x 24	5.2 m	24 W x 2	28 W x 2	500 mA	3500 K	3900 lm x 2	3650 lm x 2	130 lm/W	1.7 m ³	34.9 kg
215130/4/... ²	DROP II LED 2 x 24	5.2 m	24 W x 2	28 W x 2	500 mA	4000 K	4350 lm x 2	4150 lm x 2	148 lm/W	1.7 m ³	34.9 kg
215130/6/... ²	DROP II LED 2 x 24	5.2 m	24 W x 2	28 W x 2	500 mA	5000 K	4350 lm x 2	4150 lm x 2	148 lm/W	1.7 m ³	34.9 kg
215132/1/... ²	DROP II LED 2 x 36	5.2 m	36 W x 2	41 W x 2	750 mA	2700 K	5300 lm x 2	5000 lm x 2	122 lm/W	1.7 m ³	34.9 kg
215132/3/... ²	DROP II LED 2 x 36	5.2 m	36 W x 2	41 W x 2	750 mA	3500 K	5450 lm x 2	5150 lm x 2	126 lm/W	1.7 m ³	34.9 kg
215132/4/... ²	DROP II LED 2 x 36	5.2 m	36 W x 2	41 W x 2	750 mA	4000 K	6300 lm x 2	6000 lm x 2	146 lm/W	1.7 m ³	34.9 kg
215132/6/... ²	DROP II LED 2 x 36	5.2 m	36 W x 2	41 W x 2	750 mA	5000 K	6300 lm x 2	6000 lm x 2	146 lm/W	1.7 m ³	34.9 kg
215133/1/... ²	DROP II LED 2 x 48	5.2 m	48 W x 2	55 W x 2	1000 mA	2700 K	6600 lm x 2	6300 lm x 2	115 lm/W	1.7 m ³	34.9 kg
215133/3/... ²	DROP II LED 2 x 48	5.2 m	48 W x 2	55 W x 2	1000 mA	3500 K	6900 lm x 2	6550 lm x 2	119 lm/W	1.7 m ³	34.9 kg
215133/4/... ²	DROP II LED 2 x 48	5.2 m	48 W x 2	55 W x 2	1000 mA	4000 K	7800 lm x 2	7400 lm x 2	135 lm/W	1.7 m ³	34.9 kg
215133/6/... ²	DROP II LED 2 x 48	5.2 m	48 W x 2	55 W x 2	1000 mA	5000 K	7800 lm x 2	7400 lm x 2	135 lm/W	1.7 m ³	34.9 kg

1) tolerance +/- 5% due to LEDs accuracy

2) symbol of chosen optical system eg. 215133/6/A is DROP II LED 2 x 48 5000K with asymmetric optical system



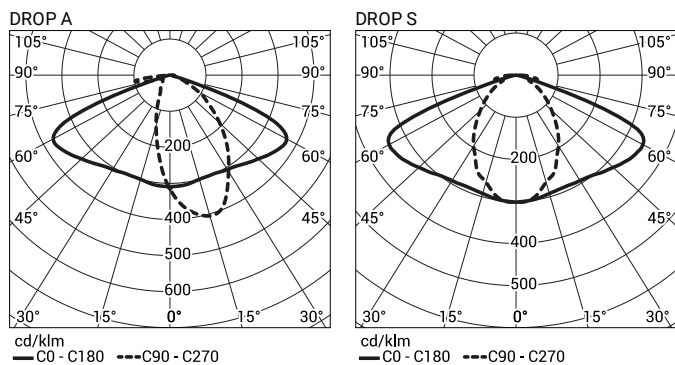

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,

Overcurrent switches MCB type B or C

Lighting sets	Typ	2A	4A	6A	10A	16A	20A	25A
DROP II LED 24W, 36W	B	1	3	5	8	13	16	20
	C	1	5	8	13	22	27	33
DROP II LED 48W	B	0	1	2	3	5	6	7
	C	0	2	3	5	8	10	13

Fuse – type gG and GL

Lighting sets	2A	4A	6A	10A	16A	20A	25A
DROP II LED 24W, 36W	0	5	9	12	25	34	48
DROP II LED 48W	0	2	4	5	11	15	22