

TECHNICAL DATA


Diffuser	PMMA
Application	motorways and expressway, urban roads, parkings
Ingress protection	IP 66 for the optical part and the driver
Material	anodised aluminium alloy
Operating temperature range	from -40°C to +55°C
Expected useful lifetime	L80B20 – 100 000 h
CRI	>70
Input voltage frequency	50/60Hz
Power factor	≥0.95
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).



TABLE OF TYPES

Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	Colour temperature (CCT)	Luminaire luminous flux ¹	Luminous efficacy ¹	Unit volume	Net weight
4273027/3/... ²	SAL 9 WŁN 1/1,5/1,7/5 EDGE-1	9 m	10 W	14 W	3500 K	1150 lm	82 lm/W	0.67 m ³	45.3 kg
4273027/6/... ²	SAL 9 WŁN 1/1,5/1,7/5 EDGE-1	9 m	10 W	14 W	5000 K	1150 lm	82 lm/W	0.67 m ³	45.3 kg
4273127/3/... ²	SAL 10 WŁN 1/1,5/2,7/5 EDGE-1	10 m	10 W	14 W	3500 K	1150 lm	82 lm/W	0.74 m ³	47.4 kg
4273127/6/... ²	SAL 10 WŁN 1/1,5/2,7/5 EDGE-1	10 m	10 W	14 W	5000 K	1150 lm	82 lm/W	0.74 m ³	47.4 kg
4273227/3/... ²	SAL 11 WŁN 1/1,5/3,7/5 EDGE-1	11 m	10 W	14 W	3500 K	1150 lm	82 lm/W	0.82 m ³	49.5 kg
4273227/6/... ²	SAL 11 WŁN 1/1,5/3,7/5 EDGE-1	11 m	10 W	14 W	5000 K	1150 lm	82 lm/W	0.82 m ³	49.5 kg
4273029/3/... ²	SAL 9 WŁN 1/1,5/1,7/5 EDGE-2	9 m	20 W	26 W	3500 K	2350 lm	90 lm/W	0.67 m ³	45.3 kg
4273029/6/... ²	SAL 9 WŁN 1/1,5/1,7/5 EDGE-2	9 m	20 W	26 W	5000 K	2350 lm	90 lm/W	0.67 m ³	45.3 kg
4273129/3/... ²	SAL 10 WŁN 1/1,5/2,7/5 EDGE-2	10 m	20 W	26 W	3500 K	2350 lm	90 lm/W	0.74 m ³	47.4 kg
4273129/6/... ²	SAL 10 WŁN 1/1,5/2,7/5 EDGE-2	10 m	20 W	26 W	5000 K	2350 lm	90 lm/W	0.74 m ³	47.4 kg
4273229/3/... ²	SAL 11 WŁN 1/1,5/3,7/5 EDGE-2	11 m	20 W	26 W	3500 K	2350 lm	90 lm/W	0.82 m ³	49.5 kg
4273229/6/... ²	SAL 11 WŁN 1/1,5/3,7/5 EDGE-2	11 m	20 W	26 W	5000 K	2350 lm	90 lm/W	0.82 m ³	49.5 kg

1) tolerance +/- 5% due to LEDs accuracy

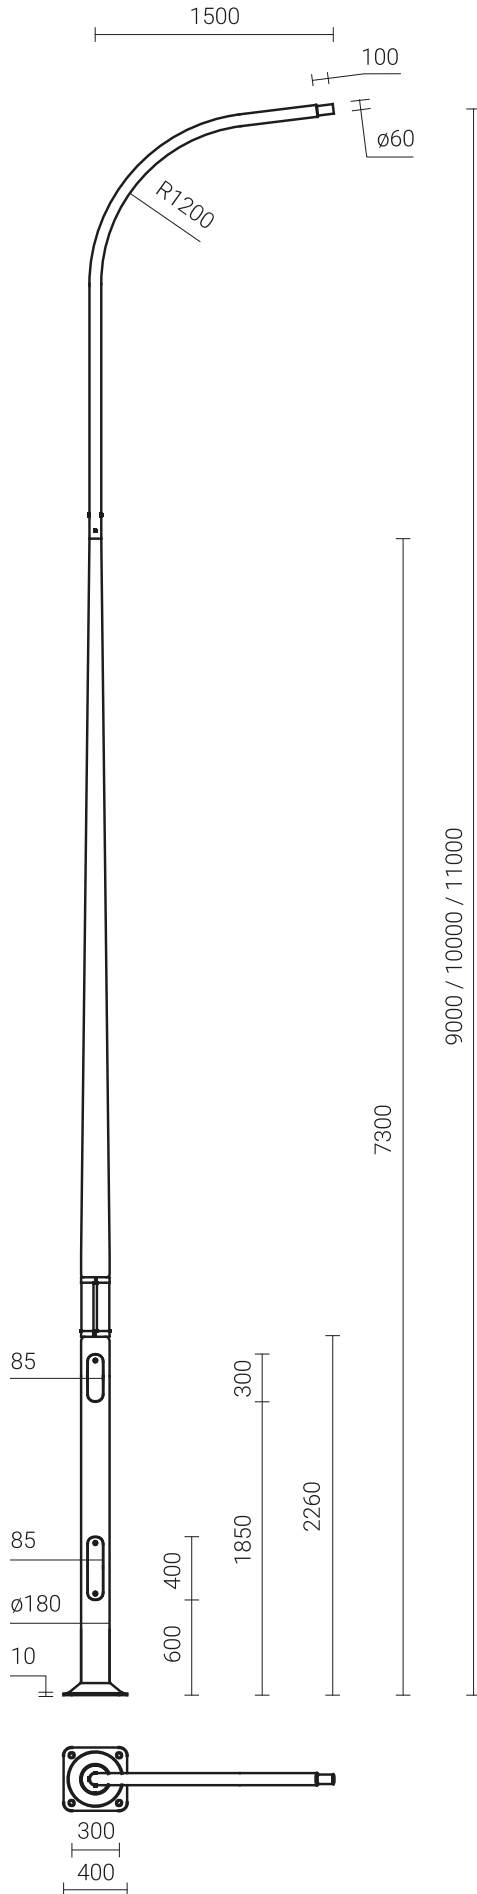

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,