


Aluminium column SAL-11 P11 OZ



176 mm at the base plate

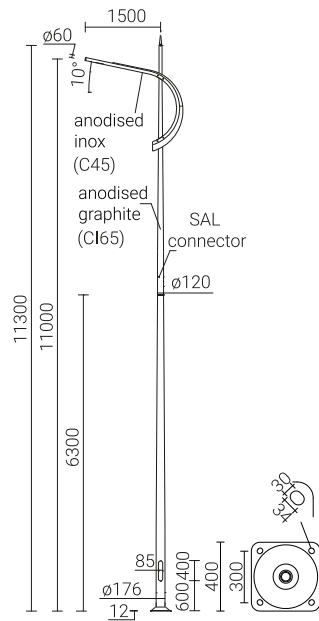

TECHNICAL DATA

Anodising	graphite / inox
Luminaire mounting	directly on the extension arm, luminaires with $\phi 60$ mm mounting with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
Packing	sleeve material
Performance under vehicle impact (passive safety)	Classe 0
Diameter at the base plate	176 mm
Finish	brushed anodised aluminium, option of elastomer protection in column's colour up to a height of 350 mm (other height on customer's request)




TABLE OF TYPES

Code	Symbol	Height of the column [H]	Wall thickness	Unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners	Net weight
42493/Cl65/C45/C...	SAL-11 P11 OZ	11.3 m	5.2 mm	0.705 m ³	B-70 / Z-70	311170 / 311207	4012	73.3 kg

STRENGTH TABLE

SAL-11 P11 OZ					Acceptable windage of single luminaire [m ²] for Cx=1				
		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s				
Permissible weight of a single luminaire [kg]	Zone I, terrain category III	Zone I and III, terrain category III up to 450m a.s.l.		Zone II, terrain category III	Zone III, terrain category III up to 755m a.s.l.				
15	0,60	0,40		0,24	0,13				

We perform individual strength calculations for other wind zones and wind speeds