



TECHNICAL DATA

Application	surrounding office buildings
Colour	inox / grey
Ingress protection	IP 66 for the optical part and the driver
Material	anodised aluminium alloy
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Input voltage frequency	50/60Hz
Power factor	≥0.95
Number of LED	12 - (24 W, 36 W), 24 - (48 W, 72 W)
Control system	LED lighting set has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1-10V).




TABLE OF VARIANTS

Code	Symbol	LED power	Luminaire power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ¹	Luminaire luminous flux ¹	Luminous efficacy ¹	Unit volume	Net weight
210630/1/... ²	CUT LED SCONCE 24	24 W	28 W	700 mA	2700 K	4050 lm	3550 lm	127 lm/W	0.01 m ³	6.5 kg
210630/3/... ²	CUT LED SCONCE 24	24 W	28 W	700 mA	3500 K	4350 lm	3800 lm	136 lm/W	0.01 m ³	6.5 kg
210630/4/... ²	CUT LED SCONCE 24	24 W	28 W	700 mA	4000 K	4550 lm	4000 lm	143 lm/W	0.01 m ³	6.5 kg
210630/6/... ²	CUT LED SCONCE 24	24 W	28 W	700 mA	5000 K	4550 lm	4000 lm	143 lm/W	0.01 m ³	6.5 kg
210632/1/... ²	CUT LED SCONCE 36	36 W	40 W	1000 mA	2700 K	5450 lm	4800 lm	120 lm/W	0.01 m ³	6.5 kg
210632/3/... ²	CUT LED SCONCE 36	36 W	40 W	1000 mA	3500 K	5800 lm	5100 lm	128 lm/W	0.01 m ³	6.5 kg
210632/4/... ²	CUT LED SCONCE 36	36 W	40 W	1000 mA	4000 K	6150 lm	5400 lm	135 lm/W	0.01 m ³	6.5 kg
210632/6/... ²	CUT LED SCONCE 36	36 W	40 W	1000 mA	5000 K	6150 lm	5400 lm	135 lm/W	0.01 m ³	6.5 kg
210633/1/... ²	CUT LED SCONCE 36	48 W	55 W	700 mA	2700 K	8150 lm	7150 lm	130 lm/W	0.01 m ³	7 kg
210633/3/... ²	CUT LED SCONCE 36	48 W	55 W	700 mA	3500 K	8650 lm	7600 lm	138 lm/W	0.01 m ³	7 kg
210633/4/... ²	CUT LED SCONCE 36	48 W	55 W	700 mA	4000 K	9150 lm	8050 lm	146 lm/W	0.01 m ³	7 kg
210633/6/... ²	CUT LED SCONCE 36	48 W	55 W	700 mA	5000 K	9150 lm	8050 lm	146 lm/W	0.01 m ³	7 kg
210635/1/... ²	CUT LED SCONCE 36	72 W	79 W	1000 mA	2700 K	10900 lm	9600 lm	122 lm/W	0.01 m ³	7 kg
210635/3/... ²	CUT LED SCONCE 36	72 W	79 W	1000 mA	3500 K	11600 lm	10200 lm	129 lm/W	0.01 m ³	7 kg
210635/4/... ²	CUT LED SCONCE 36	72 W	79 W	1000 mA	4000 K	12300 lm	10800 lm	137 lm/W	0.01 m ³	7 kg


1) tolerance +/- 5% due to LEDs accuracy

DIRECTIVES AND STANDARDS

DIRECTIVES: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC
STANDARDS: PN-EN IEC 60598-1: 2021-7, PN-EN 60598-2-3: 2006, PN-EN 60529: 2003, PN-EN 62262: 2003, PN-EN 62471:2010, PN-EN 55015: 2019, PN-EN 61547: 2009, PN-EN 61000-3-2: 2019, PN-EN 61000-3-3: 2014

Lighting parameters presented based on laboratory tests according to IESNA LM-79-19

PHOTOMETRIC CURVES

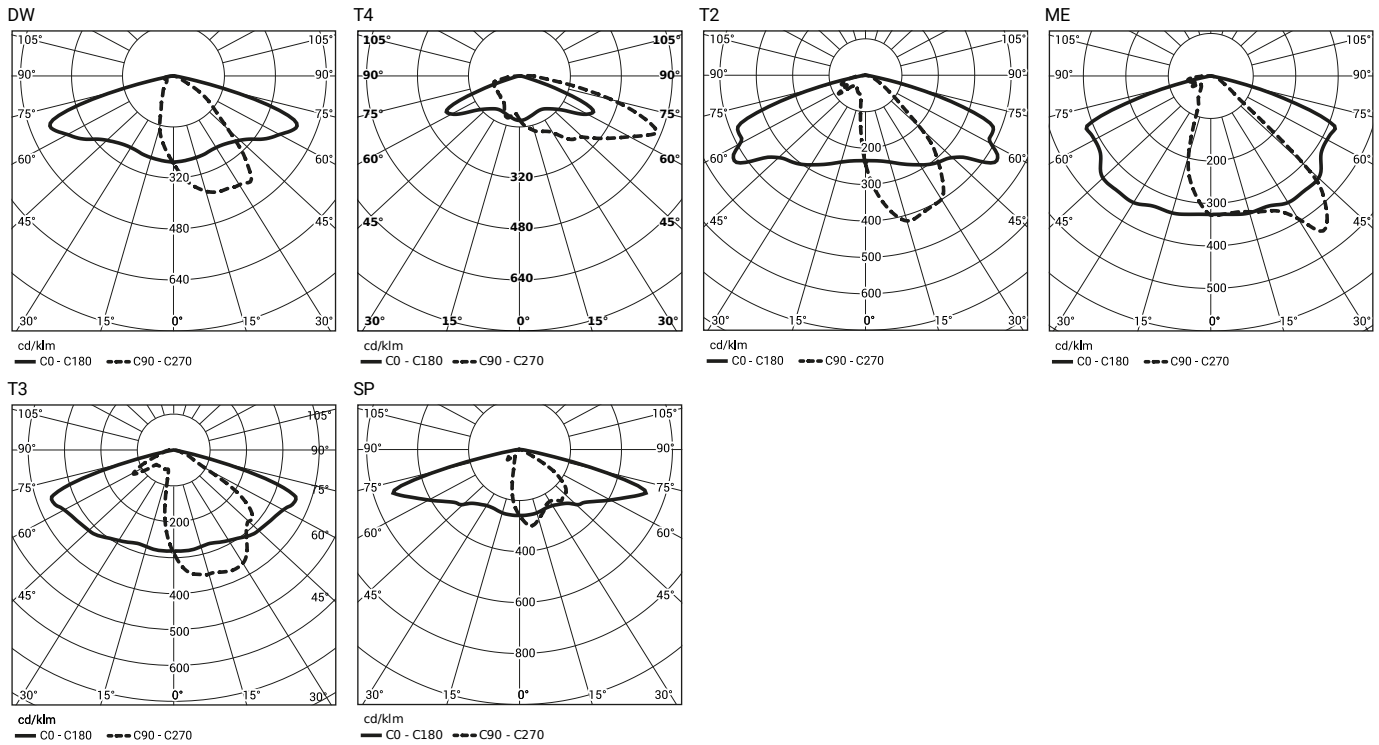

POWER SYSTEM FUNCTIONS

Luminaire in standard has following functions of intelligent power supply:

- Connection to outside control system by DALI interface (operation of analog signal 1-10V as an option),
- Possibility of programming multistage dimming of luminaire, up to 5 intervals in the range of from 10 to 100% of nominal power,
- Temperature protection of LED module (from overheating) in case of unintentional luminaire operation during the,
- Regulation of power / luminous flux – the option of setting another value than the catalogue in the range of 30-100% of nominal one,