

TECHNICAL DATA

| | |
|--------------------------|--|
| Application | surrounding office buildings, parks, pedestrians |
| Colour | inox / grey |
| Ingress protection | IP 66 for the optical part and the driver |
| Material | anodised aluminium alloy |
| Expected useful lifetime | L90B10 - 100 000 h |
| CRI | >70 |
| Input voltage frequency | 50/60Hz |
| Number of LED | 4 |





TABLE OF TYPES

| Code | Symbol | Height of the column [H] | LED power | Luminaire power consumption | Colour temperature (CCT) | LEDs luminous flux ¹ | Luminaire luminous flux ¹ | Luminous efficacy ¹ | Unit volume | Concrete footing / reinforcement basket type | Net weight |
|----------|------------------|--------------------------|-----------|-----------------------------|--------------------------|---------------------------------|--------------------------------------|--------------------------------|----------------------|--|------------|
| 215908/1 | SIMPLE CUT LED 8 | 700 mm | 8 W | 12 W | 2700 K | 1350 lm | 500 lm | 42 lm/W | 0.022 m ³ | B-0A / Z-0A | 4.5 kg |
| 215908/3 | SIMPLE CUT LED 8 | 700 mm | 8 W | 12 W | 3500 K | 1450 lm | 550 lm | 46 lm/W | 0.022 m ³ | B-0A / Z-0A | 4.5 kg |
| 215908/4 | SIMPLE CUT LED 8 | 700 mm | 8 W | 12 W | 4000 K | 1500 lm | 600 lm | 50 lm/W | 0.022 m ³ | B-0A / Z-0A | 4.5 kg |
| 215908/6 | SIMPLE CUT LED 8 | 700 mm | 8 W | 12 W | 5000 K | 1500 lm | 600 lm | 50 lm/W | 0.022 m ³ | B-0A / Z-0A | 4.5 kg |


1) tolerance +/- 7% due to LEDs accuracy

TECHNICAL DRAWING

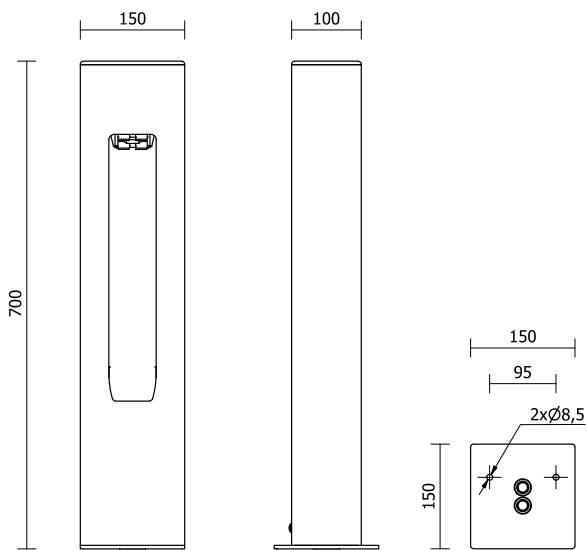

PHOTOMETRIC CURVES

SIMPLE CUT LED



cd/klm
 — C0 - C180 - - - C90 - C270

Wyłączniki nadprądowe MCB typu B lub C

| Kolumna | Typ | 2A | 4A | 6A | 10A | 16A | 20A | 25A |
|----------------|-----|----|----|----|-----|-----|-----|-----|
| SIMPLE CUT LED | B | 1 | 2 | 3 | 5 | 8 | 10 | 12 |
| | C | 1 | 3 | 5 | 8 | 13 | 16 | 20 |

Bezpieczniki topikowe—typ gG i gL

| Kolumna | 2A | 4A | 6A | 10A | 16A | 20A | 25A |
|----------------|----|----|----|-----|-----|-----|-----|
| SIMPLE CUT LED | 0 | 3 | 5 | 7 | 15 | 20 | 29 |