



TECHNICAL DATA

Application	surrounding office buildings, parks, pedestrians
Colour	inox / grey
Ingress protection	IP 66 for the optical part and the driver
Material	anodised aluminium alloy
Expected useful lifetime	L90B10 - 100 000 h
CRI	>70
Input voltage frequency	50/60Hz
Number of LED	4





TABLE OF TYPES

Code	Symbol	Height of the column [H]	LED power	Luminaire power consumption	Colour temperature (CCT)	LEDs luminous flux ¹	Luminaire luminous flux ¹	Luminous efficacy ¹	Unit volume	Concrete footing / reinforcement basket type	Net weight
215908/1	SIMPLE CUT LED 8	700 mm	8 W	12 W	2700 K	1350 lm	500 lm	42 lm/W	0.022 m ³	B-0A / Z-0A	4.5 kg
215908/3	SIMPLE CUT LED 8	700 mm	8 W	12 W	3500 K	1450 lm	550 lm	46 lm/W	0.022 m ³	B-0A / Z-0A	4.5 kg
215908/4	SIMPLE CUT LED 8	700 mm	8 W	12 W	4000 K	1500 lm	600 lm	50 lm/W	0.022 m ³	B-0A / Z-0A	4.5 kg
215908/6	SIMPLE CUT LED 8	700 mm	8 W	12 W	5000 K	1500 lm	600 lm	50 lm/W	0.022 m ³	B-0A / Z-0A	4.5 kg


1) tolerance +/- 7% due to LEDs accuracy

TECHNICAL DRAWING

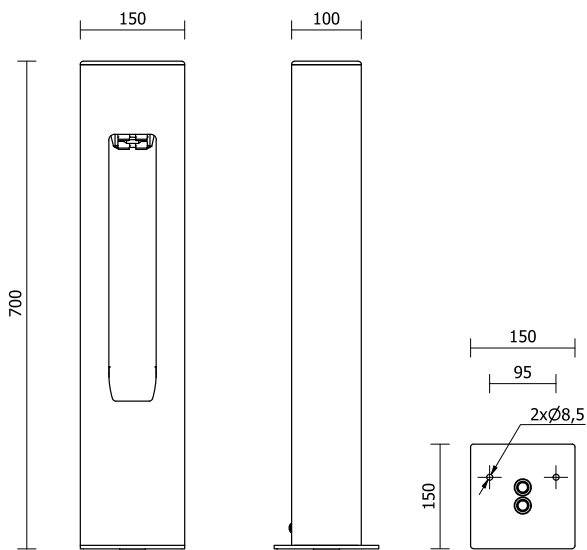

PHOTOMETRIC CURVES

SIMPLE CUT LED



Wyłączniki nadprądowe MCB typu B lub C

Kolumna	Typ	2A	4A	6A	10A	16A	20A	25A
SIMPLE CUT LED	B	1	2	3	5	8	10	12
	C	1	3	5	8	13	16	20

Bezpieczniki topikowe—typ gG i gL

Kolumna	2A	4A	6A	10A	16A	20A	25A
SIMPLE CUT LED	0	3	5	7	15	20	29