





TECHNICAL DATA

Assembly	installed on the aluminium rail on the back wall of the column using two M6 bolts
Ingress protection	IP 54
Material	integrated terminal strip – made of PTB material (butylene polyterephthalate), with high insulation parameters and high mechanical resistance; connection cover and clamp/cable protection – made of transparent polycarbonate; connection box base – made of polycarbonate reinforced by fibre glass, cable opening/outlets are protected with gaskets
Number of fuse-sockets	One fuse-socket mounted on L1 phase, there is a possibility of moving the fuse-socket on phase L2 or L3 by screwing-out two bolts
Description	5 tracks connection boxes for feeder cables with cross-section from 5 x 6 mm ² up 5 x 16 mm ² max. 3 cables the possibility of splitting load into particular phases the possibility of moving the fuse-sockets



Code	Symbol	Unit volume	Fuse sockets quantity	Protection class	Rated insulation voltage	Withstand stroke voltage rating	Rated current	Net weight
324120	NTB-2	0.002 m ³	2	II	500 V	6 kV	80 A	0.73 kg

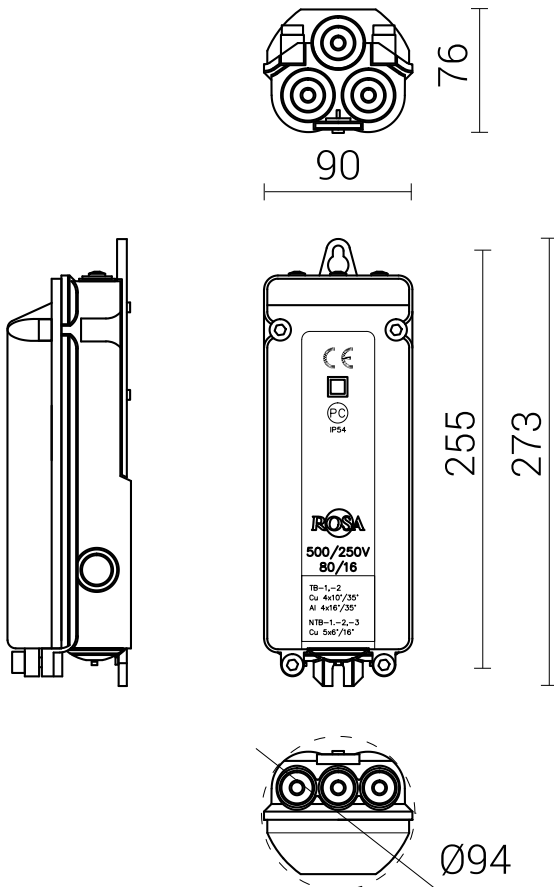

Fuse-link D01

Fuse-link typej	Code	Weight
D01/E14 6A	322006	0,01kg

Updated at: 03-04-2023

NTB-2



Fuse-link typej	Code	Weight
D01/E14 10A	322010	0.01kg
D01/E14 16A	322016	0.01kg